



Style: Uncommon Ground | 0187V  
Color: Zen | 02520

## Durable Style.

Luxury Vinyl Plank meets the needs of a wide variety of commercial installations due to its durable and moisture tolerant surface. Introducing Uncommon Ground, the latest plank flooring from Shaw Hard Surface, proof that high performance engineering can work in harmony with cutting edge styling. The color line features 24 wood and abstract visuals that come in both 4" and 6" widths for maximum flexibility. The pursuit of innovative design leads you to Uncommon Ground.

- ExoGuard™ Quartz-Enhanced Urethane finish and 20 mil commercial wear layer perform in heavy commercial traffic
- 3 mm thickness is more forgiving over uneven subfloors
- Polish is optional for hassle-free maintenance
- Newly designed wood visuals accentuated by wider 6" width and updated colorways
- Lightly embossed for authentic wood feel that is easy to clean
- Advanced engineering using innovative raw materials for a safer, stronger construction
- FloorScore® certified for low VOCs

### Product Specifications

Style Name	Uncommon Ground
Style Number	0187V / 4" 0188V / 6"
Construction	High Performance Luxury Vinyl Plank
Class / ASTM F1700	Class III Printed Film Vinyl Tile, Type A (smooth), Type B (embossed)
Wear Layer Thickness	20 mil or 0.020" (0.5 mm)
Overall Thickness	3 mm (nominal 0.125")
Nominal Dimensions	4" wide, 36" long (0187V) 6" wide, 36" long (0188V)
Actual Size	
Width:	3.94" or 100 mm (0187V) 5.91" or 150 mm (0188V)
Length:	36.22" or 920 mm
Backing Class	Commercial Grade
Finish	ExoGuard™ Quartz-Enhanced Urethane
Installation	Glue Down
Recommended Adhesive	Shaw 4100 or S150

### Packaging

Square Feet per Carton	35.65 sf
Pieces per Carton	36 pcs (0187V / 4") 24 pcs (0188V / 6")
Weight per Carton	38.00 lbs
Cartons per Pallet	52 cartons (0187V / 4") 48 cartons (0188V / 6")
Pallets per Truckload	18 pallets or 936 cartons (0187V / 4") 18 pallets or 864 cartons (0188V / 6")

### Testing

Slip Resistance / ASTM D2047	> 0.65 (wet/dry)
Static Load Limit / ASTM F970	1500 psi
Flexibility / ASTM F137	Passes
Resistance to Heat / ASTM F1514	Passes
Resistance to Light / ASTM F1515	Passes
Resistance to Chemicals / ASTM F925	Passes
Radiant Flux / ASTM E648	Passes, >0.45 watts/cm <sup>2</sup> , NFPA Class I
Smoke Density / ASTM E662	Passes, <450

### Warranty


10 year limited commercial wear warranty. 10 year under bed warranty when installed with Shaw 4100 or Shaw S150 spray adhesive. Please visit [www.shawhardsurface.com](http://www.shawhardsurface.com) for the most current warranty information.

### Environmental

Indoor Air Quality	FloorScore® certified
LEED Scoreboard	EQ4.1, EQ4.3

## Construction

Uncommon Ground is a high performance luxury vinyl plank featuring our exclusive ExoGuard™ quartz-enhanced urethane finish that protects against commercial traffic and requires no polish. State of the art digital imaging technology allows for precise reproduction of domestic and exotic woods for flooring that looks real but tolerates wet maintenance that natural materials cannot handle.

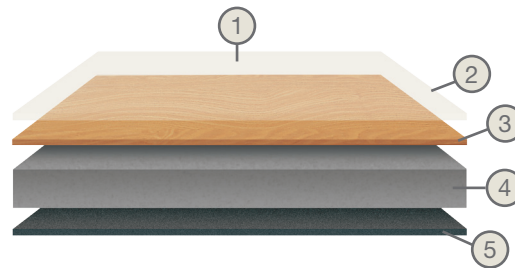

1. ExoGuard™ Quartz-Enhanced Urethane
2. Clear Wear Layer
3. High Resolution Image Layer
4. Commercial Flooring Base
5. Commercial Backing Layer

## Collection

Shaw Hard Surface is committed to creating collections of durable, stylish products that add beauty to commercial spaces around the world. The newest luxury vinyl plank rises above the ordinary, taking inspiration from both natural and abstract materials. Each of the 24 colors in Uncommon Ground is offered standard in both 4" and 6" widths to allow for unique installation patterns. Traditional hardwood visuals and abstract linear patterns complement a variety of aesthetics, while precision manufacturing ensures Uncommon Ground will withstand the rigors of commercial traffic.

